

Fig. 1

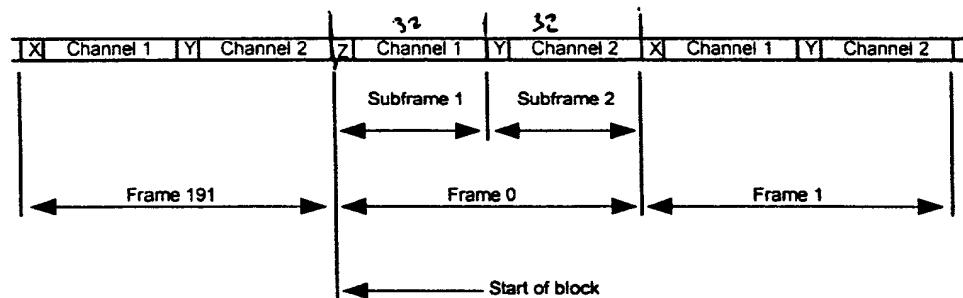


Fig. 2

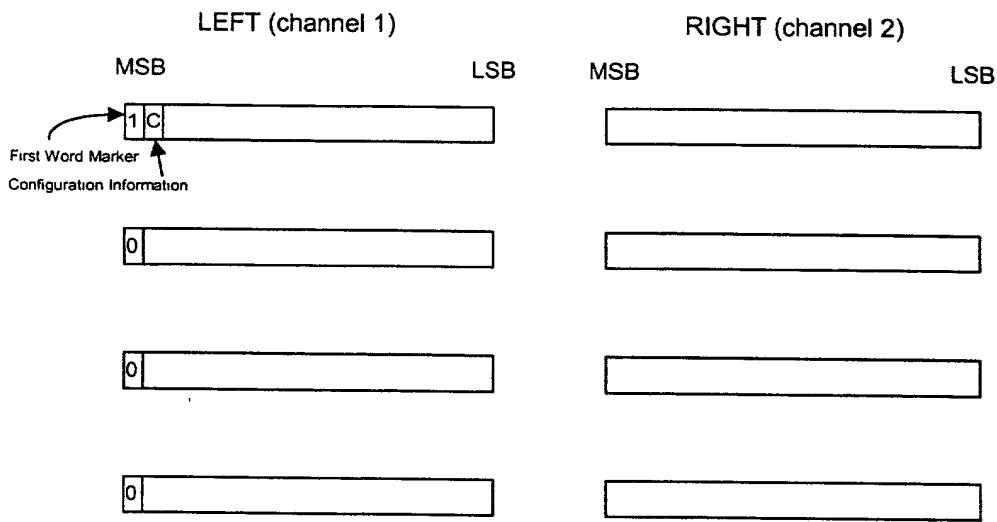


Fig. 3

Fig. 4

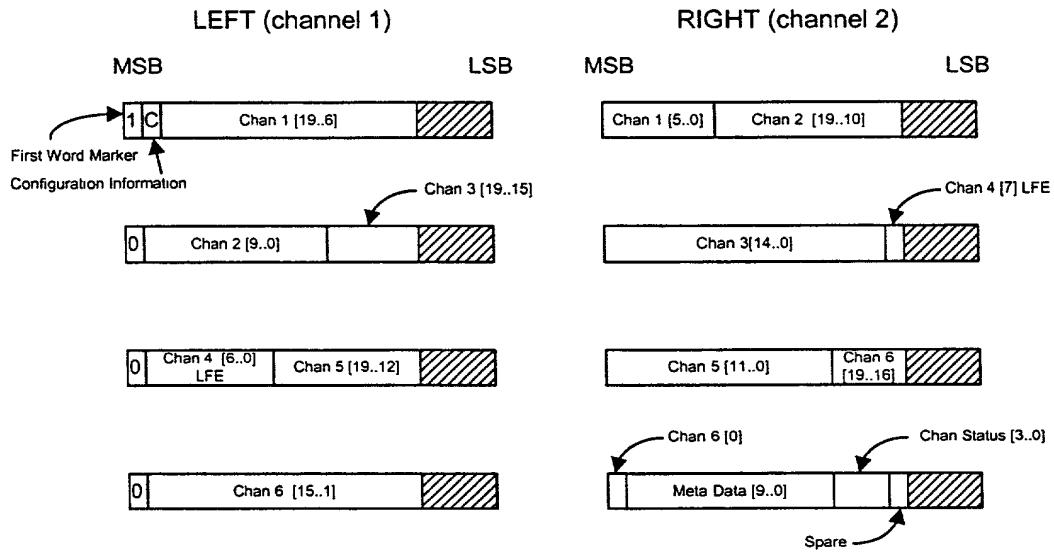


Fig. 5

	MSB	LSB	Word	Description
Header	0	0	0	1
Channel Condition			1	1111 = Present 0000 = Error other codes reserved
Channel Mode			2	From Byte 1 bits 0 to 3 of Channel status
Channel Origin			3	Byte 6 of Channel status
			4	
			5	Byte 7 of Channel status
			6	
			7	Byte 8 of Channel status
			8	
			9	Byte 9 of Channel status
			10	
Channel Destination			11	Byte 10 of Channel status
			12	
			13	Byte 10 of Channel status
			14	
			15	Byte 11 of Channel status
			16	
			17	Byte 12 of Channel status
			18	
Reserved			19	Reserved for future use
			47	

Fig. 6

09776720 - 020360

Transport Length	Audio Resolution	Audio Channels	M	T	S	Packing Code	Comment
16-bit	16-bit	7.1		X		1	
16-bit	16-bit	7.1			X	2	
16-bit	16-bit	6	X	X	X	3	
16-bit	20-bit	6				4	
16-bit	20-bit	5.1	X	X		5	
16-bit	20-bit	5.1	X		X	6	
16-bit	20-bit	5.1		X	X	7	
16-bit	24-bit	4	X	X	X	8	
20-bit	16-bit	8	X	X	X	9	
20-bit	20-bit	7.1		X		10	
20-bit	20-bit	7.1			X	11	
20-bit	20-bit	6	X	X	X	12	
20-bit	24-bit	6	X			13	
20-bit	24-bit	6		X	X	14	
20-bit	24-bit	5.1	X	X	X	15	
20-bit	20 & 16-bit	6 + 2				16	6 at 20-bit, 2 at 16-bit
20-bit	20 & 16-bit	5.1 + 2	X	X		17	5.1 at 20-bit, 2 at 16-bit
20-bit	20 & 16-bit	5.1 + 2	X		X	18	5.1 at 20-bit, 2 at 16-bit
24-bit	20-bit	8	X	X	X	19	
24-bit	24-bit	7.1	X			20	
24-bit	24-bit	7.1		X	X	21	
24-bit	24-bit	6	X	X	X	22	
24-bit	24 & 20-bit	6 + 2				23	6 at 24-bit, 2 at 20-bit
24-bit	24 & 20-bit	5.1 + 2	X	X	X	24	5.1 at 20-bit, 2 at 20-bit
16-bit	20-bit	5.1	X			25	Special Non 8000 <sub>H</sub>
20-bit	16-bit	8			X	26	Euro Hits Packing
20-bit	16-bit	8				0	Old Packing Scheme

Fig. 7